

EZ Able® SUBMITTAL DATA

FRONT VIEW



SIDE VIEW





Barrier Free Shower Pan

The shower enclosure shall be EZAP6033 BF 1.0 Pan, Left or Right. Finished surface shall be of a sanitary—grade Polyester Gelcoat exibiting a minimal thickness of 15 dry mils, and a finished cured Barcol hardness of 80—90 as tested with ASTM D—2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimensions of 60" x 33 3/8" x 4 1/2". The gelcoat pan shall meet ANSI Z124.2, NAHB, UPC, comply with CSA, and shall meet the requirements of Southern Building Code.

The enclosure shall be equipped with the following installed accessories:

- 1) Low entry 1.0" Threshold.
- 2) Left or Right Drain Location.
- 3) Easy Base self—sustaining bottom.



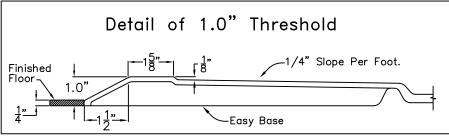

DUE TO THE NATURE OF THE MATERIALS INVOLVED UNIT DIMENSIONS MAY VARY \pm 1/2 INCH

l	Job Name:		EZ Able®	
	Model No.:		Drawing#: EZAP603 Left or Right Drain	3 BF 1.0 Pan
	Approved by:	Date Approved:	Date: 3-31-09	Revised: 2-7-11
	Rep.:	Wholesaler:	Quote No.	
	l e e e e e e e e e e e e e e e e e e e			

Recyclable Paper